


ALLURE•RGB

Smart RGB & Tuneable White LED Flush Mount

ALR120-RGB

SPECIFICATION SHEET

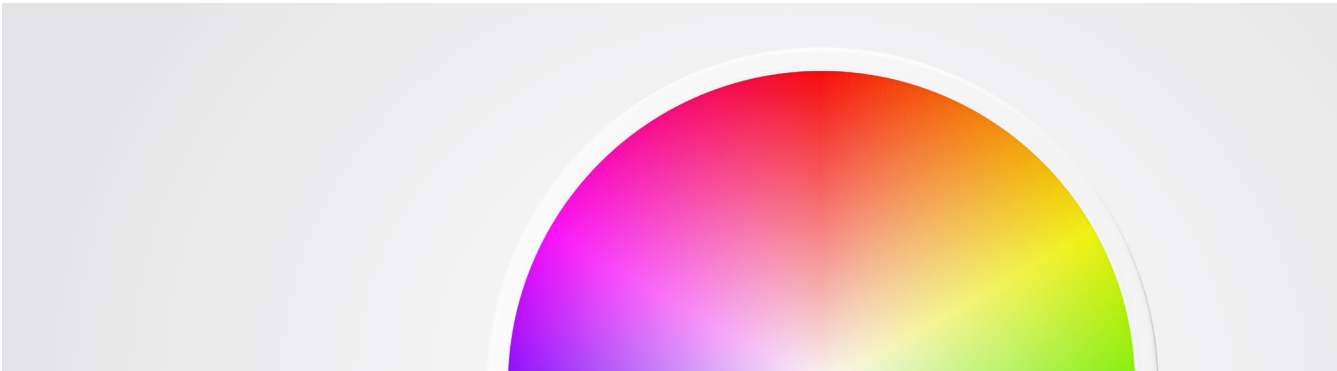

SPECIFICATIONS

Wiring

Installs easily to traditional junction boxes (3" or 4").

Housing details

The Allure-RGB features a metal construction canopy paired an acrylic diffuser lens with a metal powder coated painted trim ring for an elevated and modernized look. This unit is DAMP locations rated.

Optics

LED technology delivers 1500 lumens.

Electrical & Phase Control

Integrated LEDs are direct 120VAC with no external driver.
For INDOOR use only, surface mounted on ceilings in residential or commercial applications.
Ambient operating temperature: -4°F (-20°C) to 104°F (+40°C)
Dimmable via the Smart Life app.
Certifications: This product is ETL listed in USA & Canada and Canadian safety standards as we;; as DAMP LOCATIONS rated.
Meets all requirements of NFPA 70, NEC section 410.16., C(1).

Lens


Frosted white acrylic lens provides a smooth and even light distribution.

Selectable color temperature	RGB+CCT
Operating temperature	-4 ° F / 104 ° F
Lumen output	1500 lumens
Dimmable	Yes (via App)
Wattage	20W
Voice control	Yes
Led life	50,000 hours
Warranty	5 years
Voltage	120V
Diameter	11.8" (300 mm)
Height	2" (52 mm)

FINISHES



DIMENSIONS

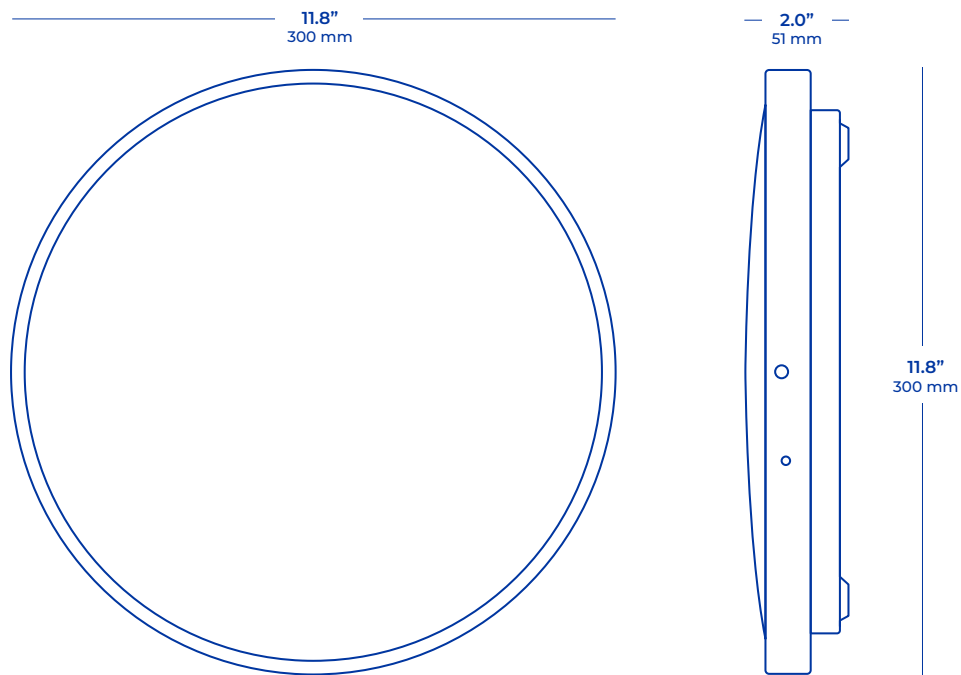

APPLICATIONS

The new Allure-RGB features full Digital RGB color tuning and white color tuning ranging from 2700K to 6500K, offering 16 million+ color options. All controlled through the Smart Life app – available for download in the Google Play Store and Apple Store. It is rated for DAMP locations and well suited for any interior surface mount installation in a residential or commercial application. The acrylic diffuser may be easily removed for installation and cleaning.

RATINGS & CERTIFICATIONS



Dimmable via
SmartLife app



Damp locations
rated



ORDERING GUIDE

Series	Color temperature	CRI	Wattage	Finish
ALR120	RGB	90	20W	WH White

Note: Configure product using **BOLD** options. Ex.: **ALR120-RGB-WH**