


# RETRO•RGB

6" Retrofit RGB+CCT Recessed Downlight

## RZR-RTRGB-640

### SPECIFICATION SHEET

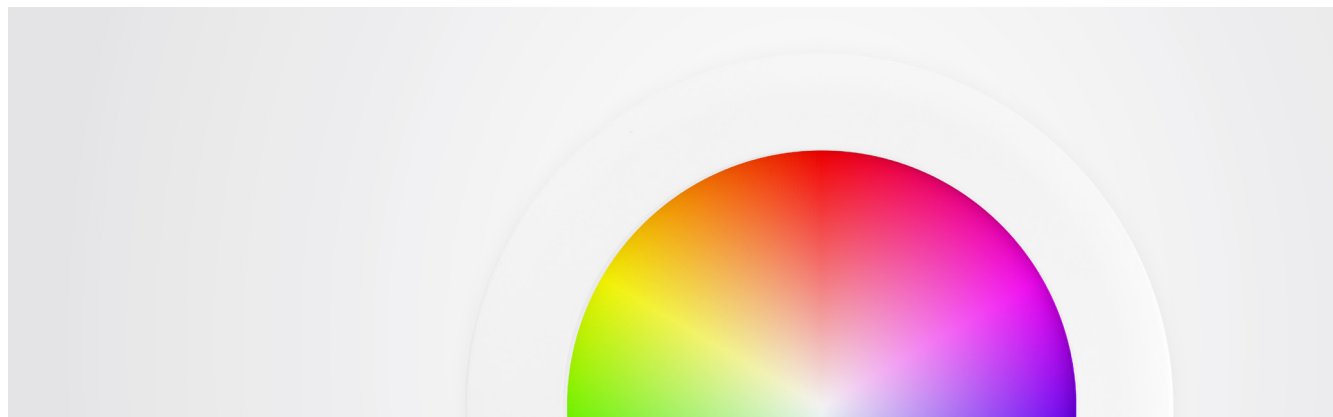

## SPECIFICATIONS

### Light Unit

Aluminum Die cast with powder paint coat preventing discoloring and rusting.

### Optics

Edge-lit LED technology(400/600 series) and back lit LED design (411/611 series) uses light guided plate to distribute the light output. A polycarbonate lens is used to provide even illumination throughout the installation. The regressed trim (411/611) design offers an anti-glare feature.

### Electrical & Phase Control

Easily connected to a 120V power supply via provided E26 socket adaptor. Dimming down to 10% via the Smart Life application. Ambient operating temperature 40°C (-40°F) to +40° (+104°F). IC, WET Location, AIR-TIGHT, T24-JA8 and T20 rated. Certifications: This product is ETL listed in USA & Canada, certified to the UL standard 1598, CSA Standard C22.2 No. 250.0.08 and Title 24 / JA8-2022.

### Wiring


12" wire lead with connectors and E26 medium base socket adaptor.

### Installation

Ideal for renovation work where the 6" traditional recessed housings are already installed. Medium Base socket adaptor with 12" wire lead connects the integrated LED fixture directly to the socket (no additional wiring required). Pressure-fit spring steel clips to hold in most 6"-6.5" housings.

Selectable color temperature	<b>RGB+Tunable white (2700K-6500K)</b>
Lumen output	<b>1055 lumens</b>
Beam angle	<b>107°</b>
CRI	<b>90</b>
Wattage	<b>12.5 watts</b>
Dimmable	<b>Yes</b>
LED life	<b>50,000 hours</b>
Warranty	<b>5 years</b>

DIMENSIONS

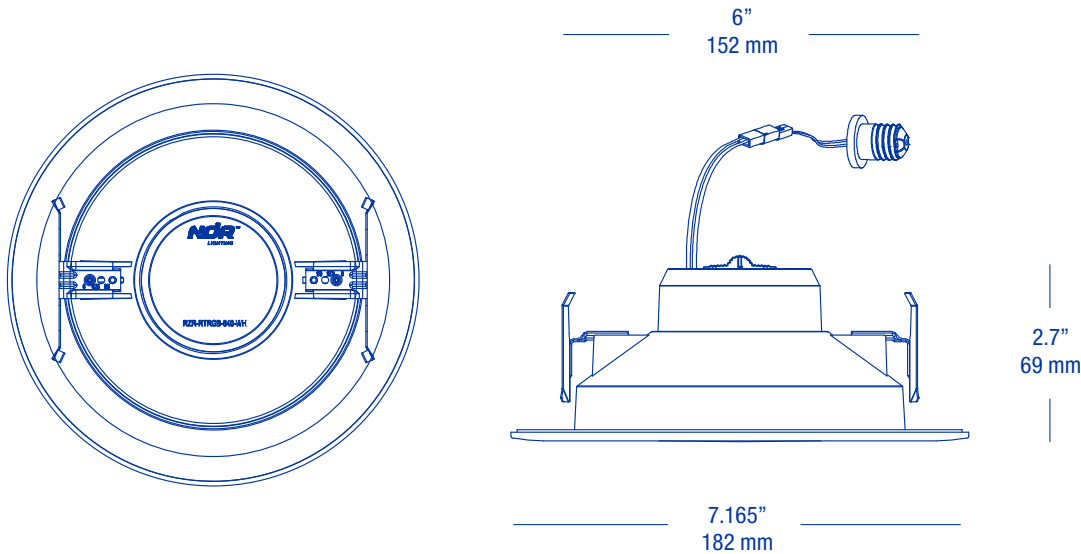

APPLICATIONS

The new Retro RGB model features full RGB color tuning + white color tuning ranging from 2700K through 6500K, offering a leading 16 million+ color options. All color output and brightness levels are easily controlled through the Smart Life app – available for download in the Google Play Store and Apple Store. It is IC and AIR-TIGHT rated and suitable for all indoor or outdoor residential, hospitality, commercial and multifamily applications where housings are already installed. Fits and holds in most 6"-6.5" housings.

RATINGS & CERTIFICATIONS



Dimmable



Wet locations  
rated



Airtight  
rated



IC rated



ORDERING GUIDE

Series	Color Temperature	CRI	Wattage	Finish
<b>RZR-RTRGB-640</b>	<b>RGB + Tunable white</b> (2700K-6500K)	90	12.5W	<b>WH</b> White

Note: Configure product using **BOLD** options. Ex.: **RZR-RTRGB-640-WH**