

GOOSENECK

Outdoor LED Wall Light

OS140-CCT

SPECIFICATION SHEET



SPECIFICATIONS



Housing details

Diecast aluminum, corrosion-resistant housing with black powder paint for lasting durability.

Fixture is fully sealed to keep out moisture and dirt (IP65).

Adjustable Wattage (20W, 30W, 40W)

3CCT Selectable (3K,4K,5K)

Photocell – Dusk/Dawn (Override possible by covering with the provided cap)

Installation

Hardware included

Adjustable Set Angle

Wet locations listed (IP65) for outdoor installations.

Can be mounted to a junction box or on a wall.

Electrical

Easily connected to a 120-277V power supply. 0-10V dimmable.

Selectable Color Temperature (3000K, 4000K, 5000K)

Rated for outdoor installations, -20°C (4°F) minimum starting ambient temperature

Listings: This product is cETLus listed to U.S and Canadian safety standards for wet locations.

DLC Premium Listed

| | |
|------------------------------|--|
| Selectable color temperature | 3K / 4K / 5K |
| Lumen output | 2400 lumens 3600 lumens 4800 lumens |
| Wattage | 20W 30W 40W |
| Voltage | 120 – 277V |
| Dimmable | Yes (0-10V) |
| CRI | 70+ |
| IP rating | IP65 |
| Photocell | YES |
| LED life | 50,000 hours |
| Warranty | 5 years |


Mounting Options

This fixture is not designed to be mounted on the ground. It is intended to be wall mounted at a height of 4 feet (1.22m) or higher using the provided hardware.

FINISHES



DIMENSIONS

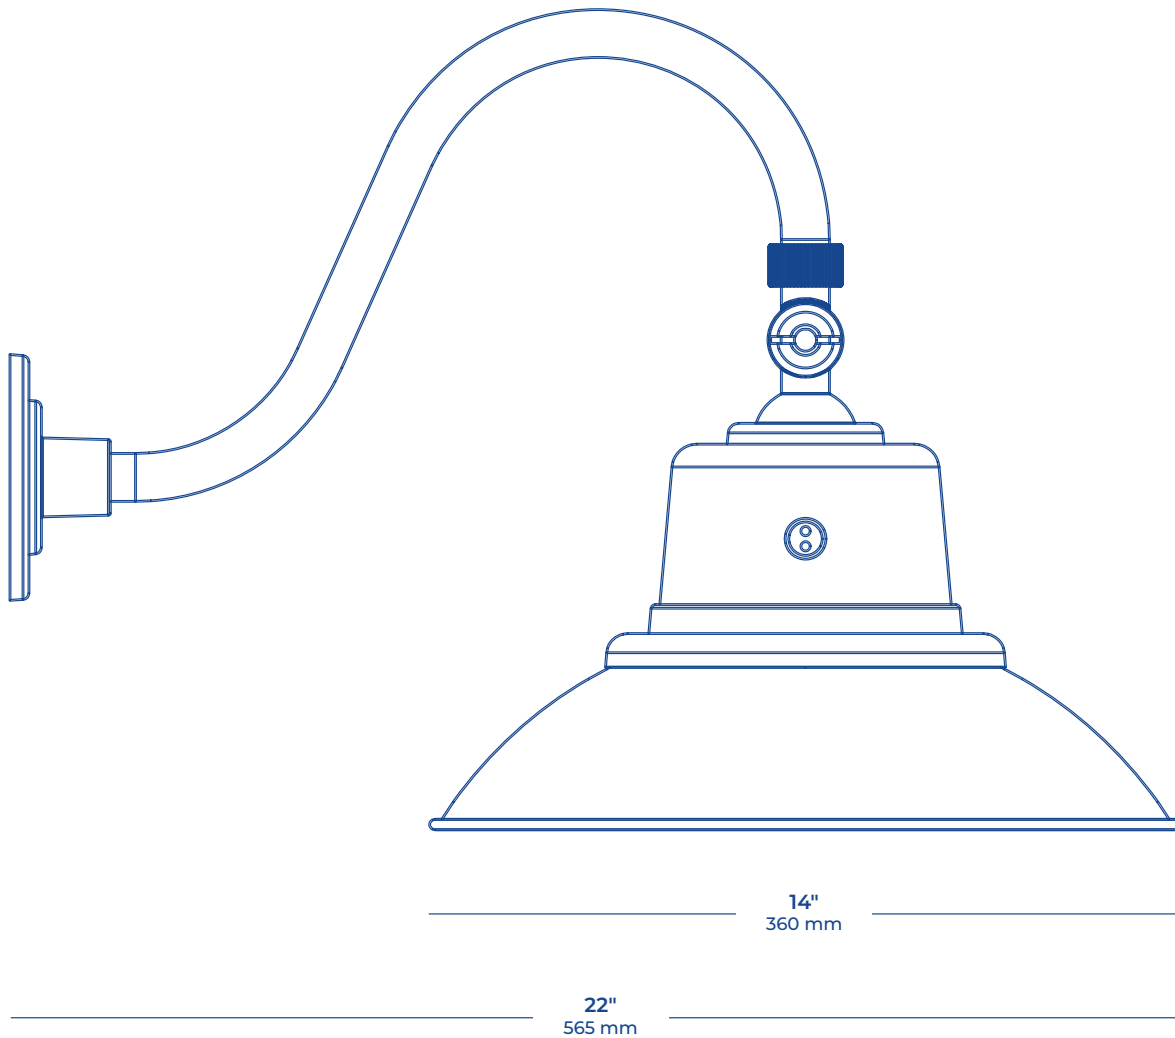

APPLICATIONS

The Gooseneck Outdoor Wall Light offers general and security lighting for outdoor residential and/or commercial applications. It's powerful lumen output, 3 selectable wattage options, 3CCT selectable color temperature, and dusk / dawn photocell option proves ideal for building facades, awnings, barn lighting, signage, and plenty more outdoor applications

RATINGS & CERTIFICATIONS



Wet locations rated



Dimmable (0-10V)

ORDERING GUIDE

| Series | Color temperature | CRI | Wattage | Finish |
|--------------|-----------------------------------|-----|---------|----------------|
| OS140 | 3CCT 3000K / 4000K / 5000K | 70+ | 40W | BK Back |

Note: Configure product using **BOLD** options: Ex: **OS140-CCT-BK**