

# 350 SERIES PINNACLE

## LED SPECIFICATION GRADE 24V TAPE LIGHT

NDR Pinnacle **350 Series** LED Tape Light offers industry specification grade technology at an affordable price.

To ensure that our CRI>94 color rendering and our high output lumen package of greater than 300LM/ft are always maintained, all our LEDs are selected using the 3-Step MacAdam binning criteria. This stringent protocol step ensures uniformity in both color and light intensity consistently across the entire run of lighting installed.

Suitable applications: kitchen cabinets, shelves, toe kicks, cove lighting & more.

### FEATURES

- Full range dimmability
- 3oz Copper per sq. ft. – Specification Grade
  - Thicker layer offers less electrical resistance and voltage drops
- 3-Step MacAdam LED binning
- Cuttable every 4"
- Maximum run – 26ft (8m)
- 3M™ mounting tape
- IP20 rated – Dry location

#### FIELD CUTTABLE


Can be cut every 4"

#### 3M™ ADHESIVE BACK

easy installations on non-porous surfaces

#### DOUBLE LAYER COPPER FOIL

3oz pure copper for superior thermal management and lower voltage drop

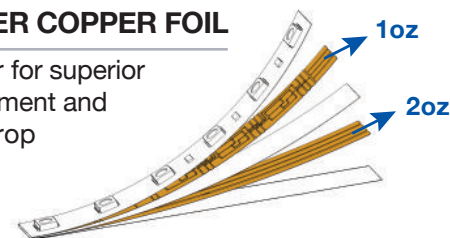

MODEL	WATTS / FT	LM / FT	WATTS / M	LM / M	CRI	REEL SIZE	IP RATING	LIFETIME	LIMITED WARRANTY
TL350-24V-27K	2.9	316	9.6	1036	94+	16.4FT (5M)	IP20	50,000 HOURS	5 YEARS
TL350-24V-3K		322		1056					
TL350-24V-4K		339		1113					
TL350-24V-3K-30		322		1056		98.4FT (30M)			