

MAMBA

24" Vapor Tight Strip Light

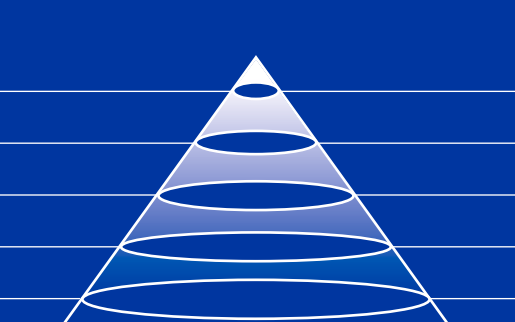
VTL24-CCT

PHOTOMETRICS SHEET

PHOTOMETRICS

Nominal size	Model	Light output	Wattage / Voltage	Selectable color temperature	CRI
24"	VTL24-CCT	2250 lm 2600 lm 3000 lm	14W / 120-347V 17W / 120-347V 20W / 120-347V	35K / 4K / 5K	80

FOOTCANDLE DIAGRAM

Mounting height (feet / meters)		Footcandles at Nadir	Diameter (feet / meters)
4' / 1.22m		56.1	10.1' / 3.08m
8' / 2.44m		14	20.2' / 6.16m
12' / 3.66m		6.2	30.3' / 9.24m
16' / 4.88m		3.5	40.4' / 12.31m
20' / 6.1m		2.2	50.5' / 15.39m

AVERAGE LUMINANCE (cd/m²)

G/C	0	45	90
0	898	617	109
45	898	651	96.2
90	898	529	16.4
180	898	596	99.2
270	898	550	17.9
360	898	631	112

ZONAL LUMEN SUMMARY

Zone	Lumens	% of luminaire
0-40	1175.6	41.4
0-60	2048	72.1
0-90	2741.7	96.5
90-180	99.7	3.5

POLAR CANDELA DISTRIBUTION

